

# Hi-Way® E2500 Heavy-Duty Spreader



The Hi-Way **E2500** includes innovative features and benefits at a competitive price.

It incorporates heavy-duty construction and a spinner hopper that accommodates spreading, dumping and storage.

#### Standard Features:

- Heavy-duty 7-gauge bottom panel and 10-gauge body and longsills. Unpainted 304 stainless steel units are made of 12-gauge body, stakes and sills with 10-gauge conveyor bottom panel.
- 24" (61cm) wide conveyor chain with 1/4" x 1 1/2" (.6cm x 3.8cm) cross bars for spreading deicing materials. The conveyor is driven with a 50:1 gear reduction drive with hi-torque/low-speed hydraulic motor.
- Heavy-duty spinner hopper broadcasts material up to 40' (12m) with a hydraulic drive, 20" (51cm) disc and six bolt-on spinner fins.
- A diverter panel provides spinner dump-over capabilities without using tools.
- The spinner hopper swings-up 180° for convenient ground storage.


#### Optional Equipment:

- Dual control hydraulic system provides independent speed control to the spinner and conveyor.
- Fenders, mud flaps and cab shield are just some of the options available.
- Other popular options: inverted "V", hinged top screens, extended idler adjustment, and extended idler grease tubes.

# E2500 Specifications



L Inside Body Length	Body Width	Overall Width (w/fenders)	OL Overall Length	Height-H	Struck Capacity	Conveyor Width	Truck CA/CT*	Spreader Shipping Weight Approx**
9' (2.74 m)	82" (208.3 cm)	96" (244 cm)	138" (350.5 cm)	50" (127 cm)	4.7 yd <sup>3</sup> (3.6 m <sup>3</sup> )	24" (61 cm)	72" (182.9 cm)	1845 lbs. (837 kg)
10' (3.05 m)	82" (208.3 cm)	96" (244 cm)	150" (381.0 cm)	50" (127 cm)	5.2 yd <sup>3</sup> (3.9 m <sup>3</sup> )	24" (61 cm)	84" (213.4 cm)	1964 lbs. (891 kg)
11' (3.35 m)	82" (208.3 cm)	96" (244 cm)	162" (411.5 cm)	50" (127 cm)	5.8 yd <sup>3</sup> (4.4 m <sup>3</sup> )	24" (61 cm)	84" (213.4 cm)	2127 lbs. (965 kg)
12' (3.66 m)	82" (208.3 cm)	96" (244 cm)	174" (442.0 cm)	50" (127 cm)	6.3 yd <sup>3</sup> (4.8 m <sup>3</sup> )	24" (61 cm)	102" (259.1 cm)	2234 lbs. (1013 kg)
13' (3.96 m)	82" (208.3 cm)	96" (244 cm)	186" (472.4 cm)	50" (127 cm)	6.9 yd <sup>3</sup> (5.3 m <sup>3</sup> )	24" (61 cm)	102"-108" (259-274 cm)	2378 lbs. (1078 kg)
14' (4.27 m)	82" (208.3 cm)	96" (244 cm)	198" (502.9 cm)	50" (127 cm)	7.5 yd <sup>3</sup> (5.7 m <sup>3</sup> )	24" (61 cm)	120" (304.8 cm)	2495 lbs. (1131 kg)
15' (4.57 m)	82" (208.3 cm)	96" (244 cm)	210" (533.4 cm)	50" (127 cm)	8.0 yd <sup>3</sup> (6.1 m <sup>3</sup> )	24" (61 cm)	120" (304.8 cm)	2710 lbs. (1229 kg)
16' (4.88 m)	82" (208.3 cm)	96" (244 cm)	222" (563.9 cm)	50" (127 cm)	8.6 yd <sup>3</sup> (6.6 m <sup>3</sup> )	24" (61 cm)	138" (350.5 cm)	2828 lbs. (1283 kg)

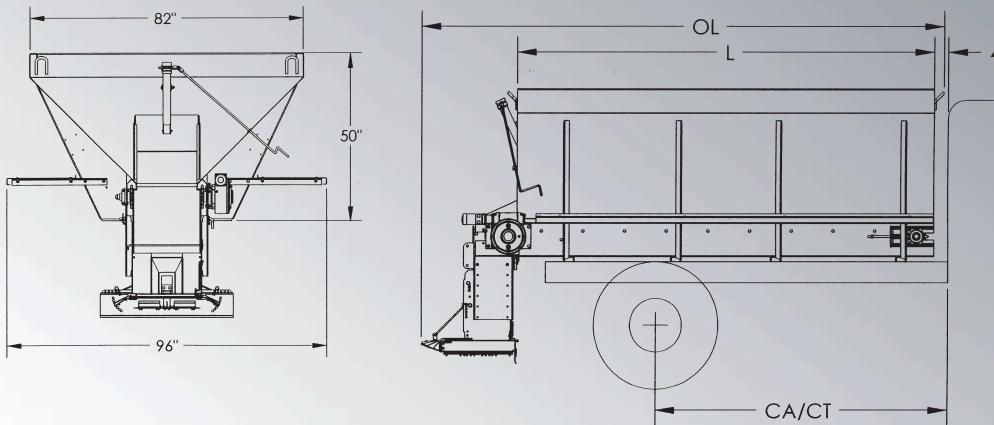

\*Typical Cab to Axle measurement. Please consult federal, state, and local weight laws and chassis manufacturer's ratings to ensure neither government weight restrictions nor the GVWR and GAWRs are exceeded.

\*\*Approximate weight includes the spreader and spinner hopper.

**With only a few tool-free adjustments, the diverter panel bypasses the spinner chute for dumping over the spinner.**

**Hi-Way NEW LEADER**  
Highway Equipment Company  
*Building the best since 1939.*

Highway Equipment Company  
1330 76th Ave. SW • Cedar Rapids, IA 52404-7052  
Phone: (319) 363-8281 or (800) 363-1771  
Fax: (319) 286-3351 or (800) 363-8267  
Online: [www.highwayequipment.com](http://www.highwayequipment.com)  
E-mail: [information@highwayequipment.com](mailto:information@highwayequipment.com)

Products and specifications subject to change without notice. Photos and illustrations may or may not include optional equipment. Hi-Way® is a registered trademark of Highway Equipment Company. Copyright 2011 Highway Equipment Company, Inc. Form No. HI137-2011-12